

Contact Details


Before using the product, please check the guide pages at the front of this catalog.

Internet

<http://www.daikinpmc.com/en/>

For latest information, PDF catalogs and operation manuals

02 Series Stacking Type Solenoid Operated Low-pressure Reducing valves

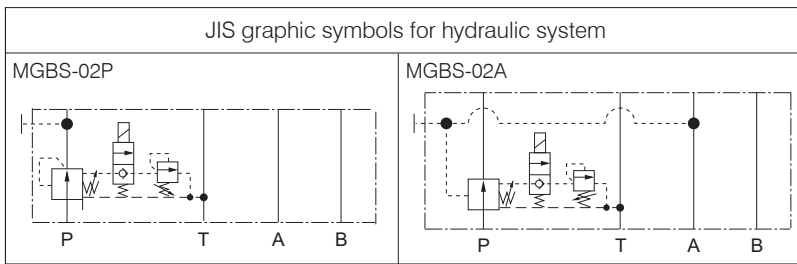

Nomenclature

MGBS - **02** ※ - **1** - **C** **03** ※ - **55** - **C** ※

1 2 3 4 5 6 7 8 9 10

- | | |
|--|---|
| <p>1 Model No.
MGBS: Modular stacking type solenoid operated low-pressure reducing valve</p> <p>2 Nominal diameter
02: ¼</p> <p>3 Control port
P: Port P
A: Port A</p> <p>4 Maximum adjustment pressure at high pressure side
1: 6.9 MPa</p> <p>5 Control method
C: Dual pressure control (High pressure when demagnetized)</p> | <p>6 Maximum adjustment pressure at low pressure side
03: 3.4 MPa</p> <p>7 Voltage code
(See the solenoid specification table)
A: AC 100 V (50/60 Hz)
B: AC 200 V (50/60 Hz)
P: DC 24 V</p> <p>8 Design No.</p> <p>9 Option code
C: DIN connector type (without lamp)</p> <p>10 Option code
No designation: Pressure adjusting screw type
T: Pressure adjusting handle type</p> |
|--|---|

Specifications

Model code	Maximum operating pressure MPa	Maximum flow rate L/min	Pressure at low pressure side adjustment range MPa {kgf/cm ² }	Pressure at high pressure side adjustment range MPa {kgf/cm ² }	Mass kg
MGBS-02※-1-C03※-55-C	7	40	0.2 to 3.4 {2 to 34}	0.8 to 7 {8 to 70}	4.8
MGBS-02※-1-C03※-55-CT					5

Voltage code and solenoid specifications

Voltage code	Power supply voltage	Starting current A	Holding current A	Holding power W	Permissible voltage fluctuation %
A	AC 100 V (50 Hz)	2.42	0.51	21.5	80 to 110
	AC 100 V (60 Hz)	2.14	0.37	18	
B	AC 200 V (50 Hz)	1.21	0.26	21.5	80 to 110
	AC 200 V (60 Hz)	1.07	0.19	18	
P	DC 24 V	–	1.22	29.2	90 to 110

Handling

- To ensure good pressure reducing performance, set a difference of 0.4 MPa minimum between the primary side main circuit pressure and the secondary pressure reducing circuit pressure.
- Directly connect the tank piping of the valve to the tank without merging it with other tank piping.
- Do not turn the handle with a hand tool or other implement when adjusting the pressure on models with a handle (-T).
- Please note that the maximum flow rate will not be attained when the low pressure range has been set.

Contact Details

Before using the product, please check the guide pages at the front of this catalog.


Internet

<http://www.daikinpmc.com/en/>


For latest information, PDF catalogs and operation manuals

External dimension diagram

MGBS-02*⁻¹-C03*⁻⁵⁵-C [with AC solenoid]

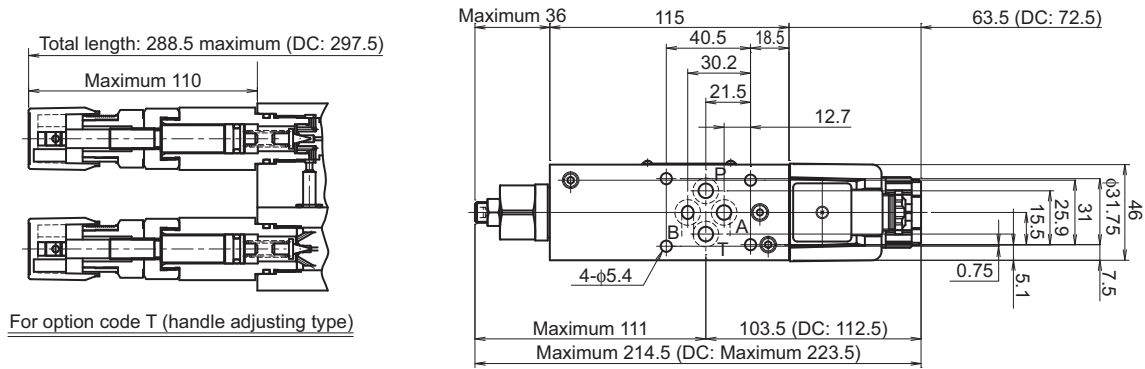


For option code T (handle adjusting type)

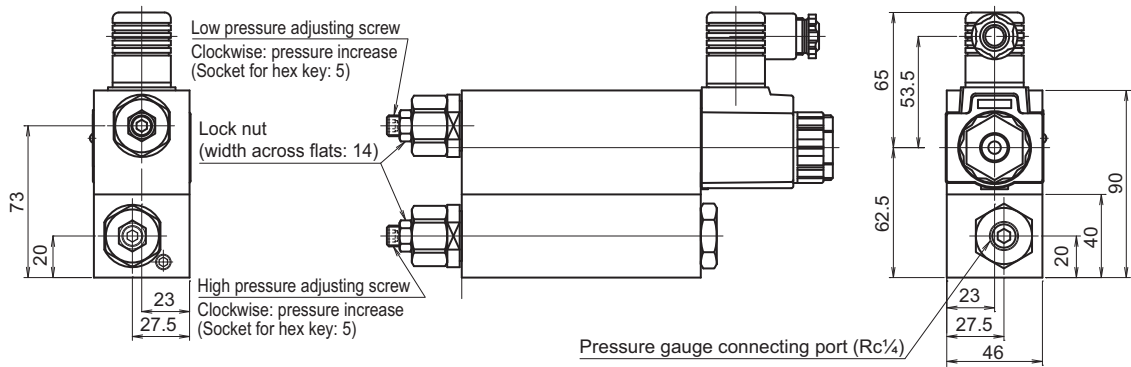

Sectional structural diagram

MGBS-02P-1-C03*⁻⁵⁵-C [with AC solenoid]

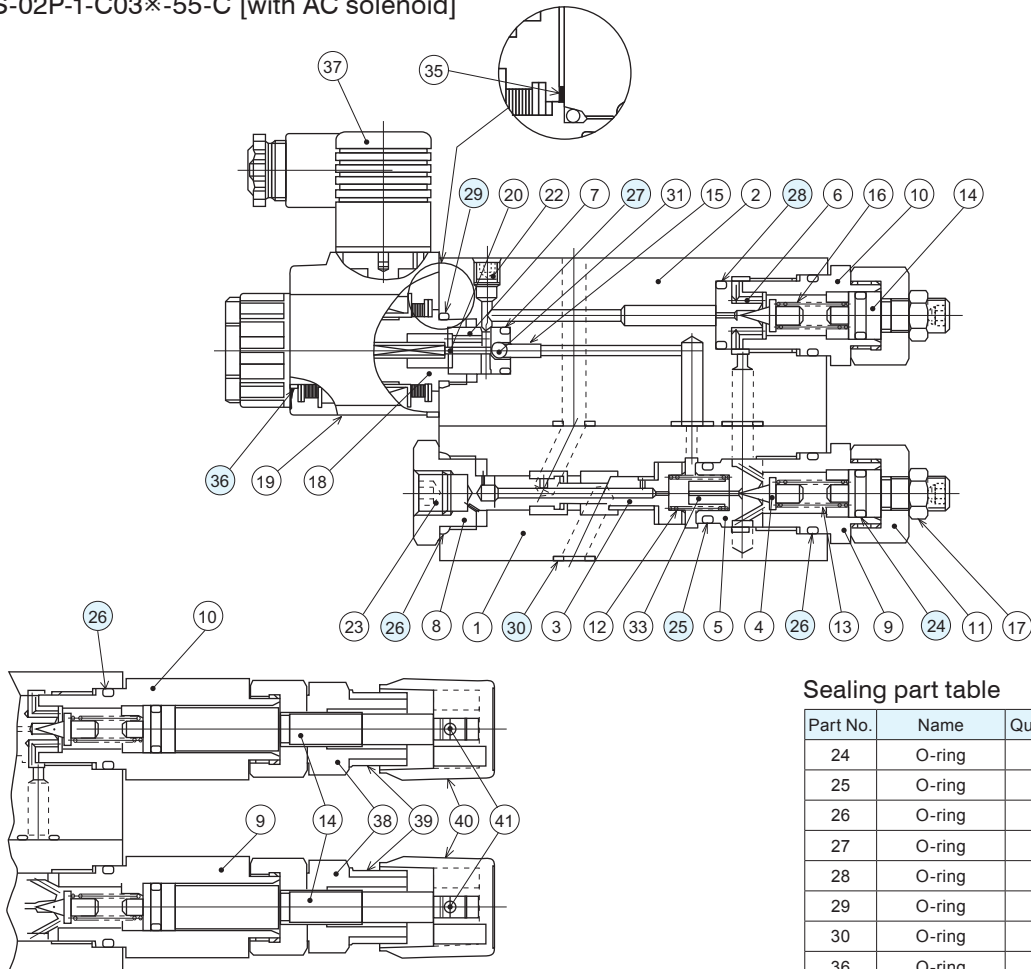

Sealing part table

Part No.	Name	Quantity	Part specifications
24	O-ring	2	JIS B 2401 1A P10A
25	O-ring	1	JIS B 2401 1B P14
26	O-ring	3	JIS B 2401 1B P20
27	O-ring	1	JIS B 2401 1B P10A
28	O-ring	1	JIS B 2401 1B P16
29	O-ring	1	JIS B 2401 1B P18
30	O-ring	10	AS568-012 (NBR, Hs90)
36	O-ring	1	JIS B 2401 1A P20

MGBS-02P-1-C03*⁻⁵⁵-CT