

Contact Details


Before using the product, please check the guide pages at the front of this catalog.

Internet

<http://www.daikinpmc.com/en/>

For latest information, PDF catalogs and operation manuals

02 Series Stacking Type Relief Valves

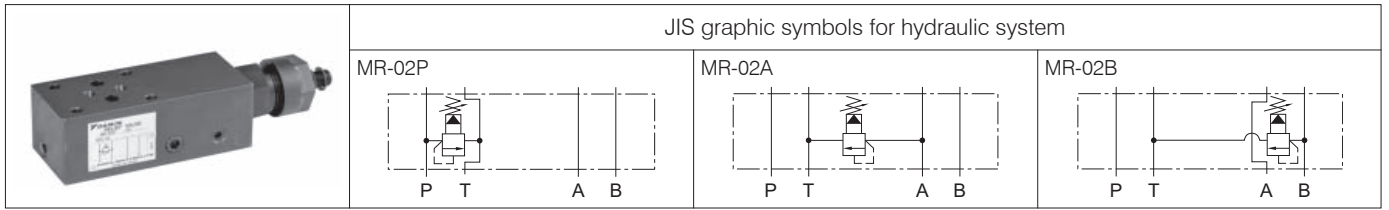

Nomenclature

※ - MR - 02 ※ - ※ - ※※ - ※ ※
 1 2 3 4 5 6 7 8

1 Applicable fluid code

No designation: Petroleum-based hydraulic fluid,
 water-glycol hydraulic fluid
 F: Phosphate ester hydraulic fluid

2 Model No.

MR: Modular stacking type relief valve

3 Nominal diameter

02: 1/4

4 Control port

P: Port P
 A: Port A
 B: Port B

5 Pressure adjustment range

1: Up to 7 MPa {Up to 70 kgf/cm²}
 2: 3.5 to 16 MPa {35 to 160 kgf/cm²}
 3: 3.5 to 25 MPa {35 to 250 kgf/cm²}
 4: 7.0 to 35 MPa {70 to 350 kgf/cm²} (applicable only to design No. 60)

6 Design No. (The design No. is subject to change)

55: 25 MPa {250 kgf/cm²} series
 60: 35 MPa {350 kgf/cm²} series

7 Pressure adjusting screw position

No designation: Adjusted at port B side
 G: Adjusted at port A side (applicable only to design No. 55)

8 Option code

No designation: Pressure adjusting screw type
 T: Pressure adjusting handle type

Specifications

Model code	Maximum operating pressure MPa {kgf/cm ² }	Maximum flow rate L/min	Pressure adjustment range *1 MPa {kgf/cm ² }	Mass kg	Pressure change MPa {kgf/cm ² } per screw revolution
MR-02※-1-55	25 {250}	40	Up to 7 {Up to 70}	1.4	2.5 {25}/revolution
MR-02※-2-55			3.5 to 16 {35 to 160}		4.6 {46}/revolution
MR-02※-3-55			3.5 to 25 {35 to 250}		7.9 {79}/revolution
MR-02※-1-60	35 {350}		Up to 7 {Up to 70}	1.5	2.5 {25}/revolution
MR-02※-2-60			3.5 to 16 {35 to 160}		4.6 {46}/revolution
MR-02※-3-60			3.5 to 25 {35 to 250}		7.9 {79}/revolution
MR-02※-4-60		7.0 to 35 {70 to 350}	9 {90}/revolution		


Note: *1 The minimum adjustment pressure varies depending on the flow rate. See the minimum adjustment pressure characteristics for details.

Handling


- Maintain the back pressure of the tank port at no greater than 0.5 MPa {5 kgf/cm²}.
- When using the valve as a safety valve, set the pressure 1 to 1.5 MPa {10 to 15 kgf/cm²} higher than the pressure set for the hydraulic circuit.

Performance curves (viscosity: 32 mm²/s {cSt})


Pressure drop characteristics

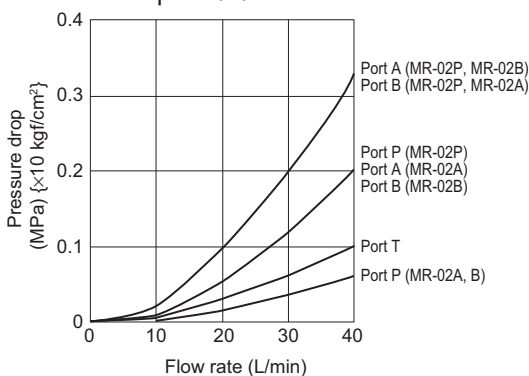

Pressure - Flow rate characteristics

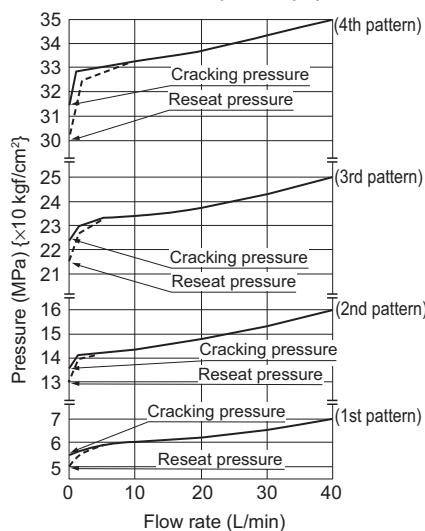

Minimum adjustment pressure characteristics

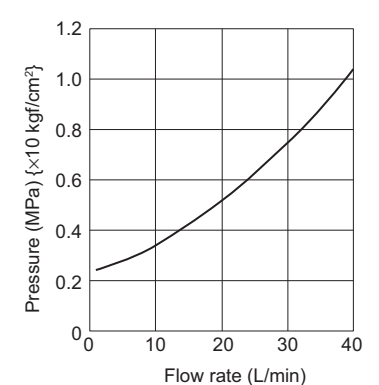

Contact Details

Before using the product, please check the guide pages at the front of this catalog.


Internet

<http://www.daikinpmc.com/en/>

For latest information, PDF catalogs and operation manuals

External dimension diagram


MR-02*-*-55

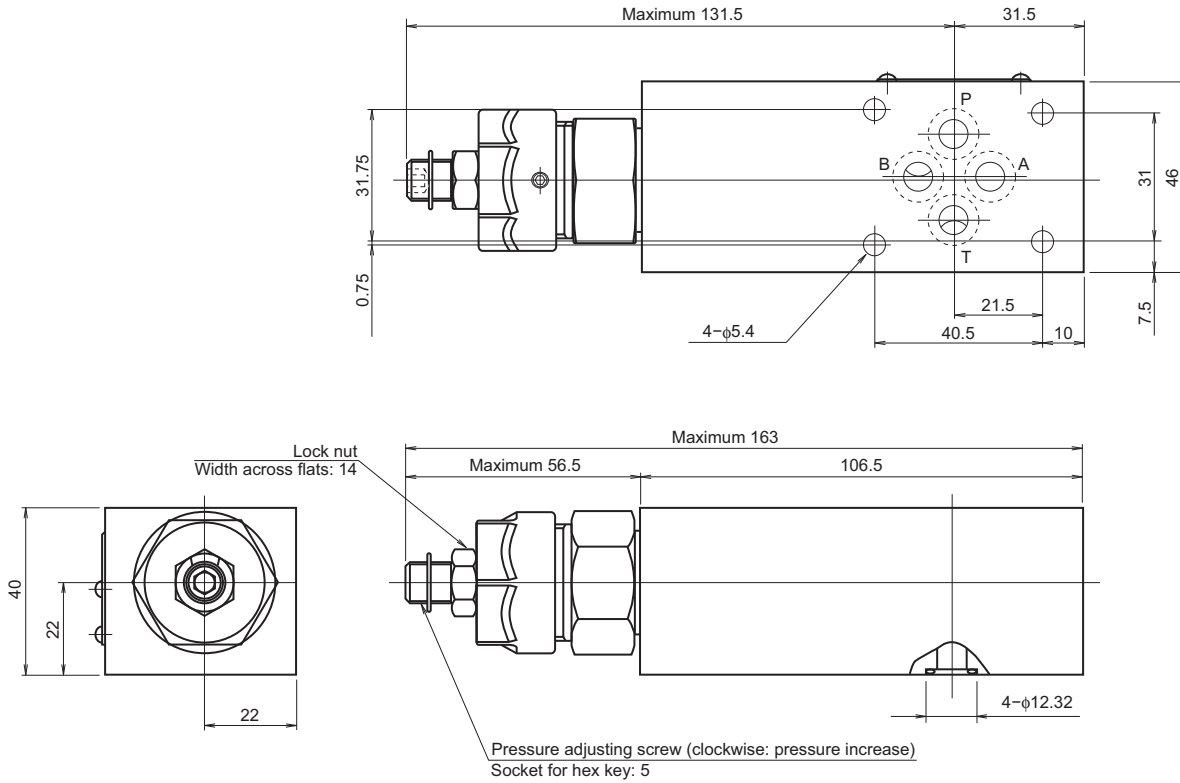

For products with option code G, the pressure adjusting screw is located at the port A side.

Sectional structural diagram

MR-02*-*-55

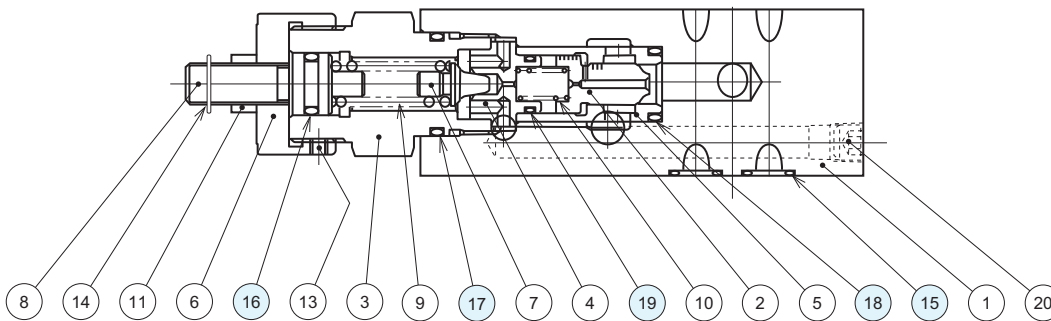

Sealing part table

Part No.	Name	Quantity	Part specifications
15	O-ring	4	AS568-012 (NBR, Hs90)
16	O-ring	1	JIS B 2401 1A P11
17	O-ring	1	JIS B 2401 1A P21
18	O-ring	1	JIS B 2401 1B P14
19	O-ring	1	AS568-013 (NBR, Hs90)

Contact Details

Before using the product, please check the guide pages at the front of this catalog.


Internet

<http://www.daikinpmc.com/en/>


For latest information, PDF catalogs and operation manuals

External dimension diagram

MR-02※-※-60

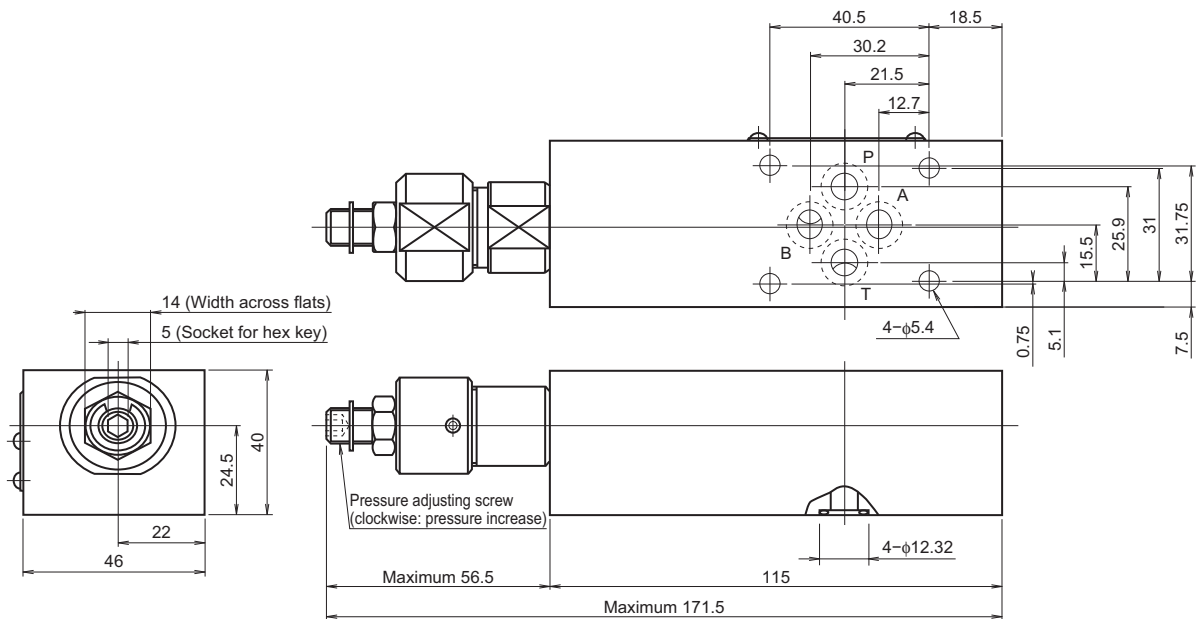


MR-02※-※-60-T

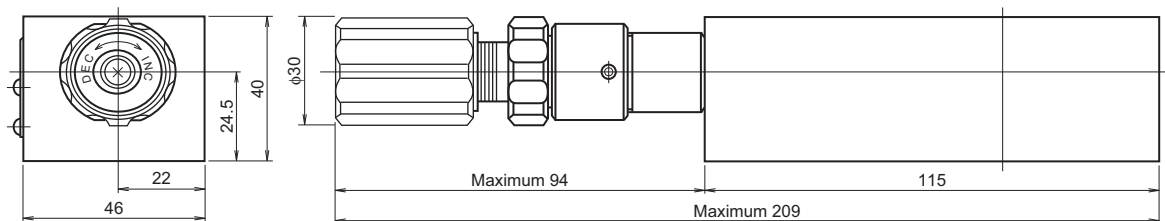

Sectional structural diagram

MR-02※-※-60

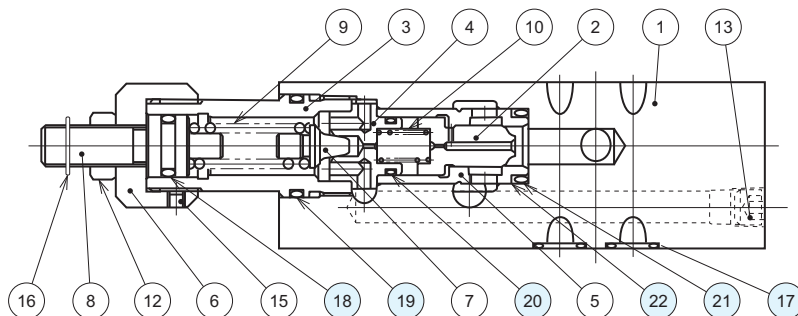

Sealing part table

Part No.	Name	Quantity	Part specifications
17	O-ring	4	AS568-012 (NBR, Hs90)
18	O-ring	1	JIS B 2401 1A P11
19	O-ring	1	JIS B 2401 1A P21
20	O-ring	1	AS568-013 (NBR, Hs90)
21	O-ring	1	JIS B 2401 1B P14
22	Backup ring	1	JIS B 2407 Bias cut P14